

XYLOFLOORING


XYLOLVT

ACOUSTIC UNDERLAY SYSTEM FOR VINYL, WPC, LVT FLOORING

XYLOLVT ACOUSTIC underlay is designed for Vinyl, SPC, WPC&LVT floors. 1.5mm thickness high density green EVA foam with 0.1mm Black PE film on one side, with **BLACK MAX** overlay for extreme support.

It also incorporates a Moisture Barrier.

It rolls out and lies flat, with self-sealing seams making it simple to connect and form a continuous vapour barrier.

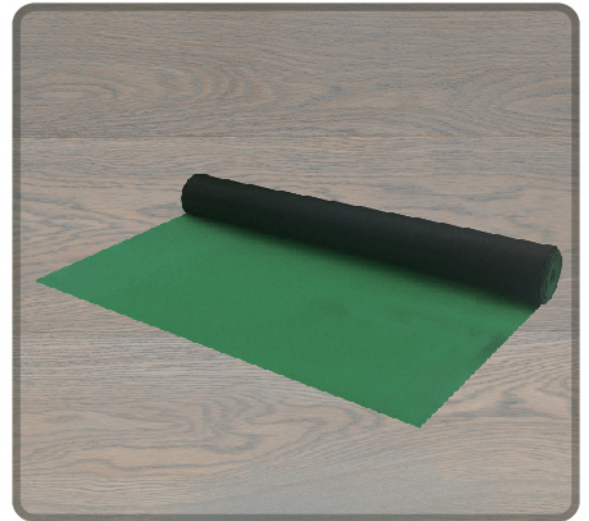

Key features

- ❖ Ideal for Vinyl, LVT, WPC floors
- ❖ Superior cushioning and wear resistance
- ❖ Superior DPM and sound control
- ❖ Provides firmness and comfort underfoot
- ❖ Protects the flooring from moisture arising from concrete
- ❖ Lay flat for easy installation
- ❖ 10m² rolls



CODE	AVAILABILITY	THICKNESS	AREA
1PVC1510	Stock item	1.5mm	10 m ²

IMPACT SOUND
REDUCTION



23dB

THICKNESS &
CONFORMABILITY



1.5mm

MOISTURE
BARRIER



YES

GUARANTEED FOR THE
LIFE OF THE FLOORING



RECYCLING



YES

www.xyloflooring.com